



ENERGY RECUPERATION



FREETIME® RANGE

Self-regulating dual flow air handling unit with rotating heat exchanger,
very high efficiency (>80%),
high recovery efficiency, compact.
Econologic® solution
Air flow 100 to 3 500 m³/h





APPLICATIONS

- ❖ Self-regulating ventilation and energy recovery, very high efficiency and high recovery efficiency in tertiary sector and industrial installations.
- ❖ Efficiency greater than 80% (EN308), compatible with RT2012+ with the ERP 2009/125/EC directive.
- Air filter, temperature control.
- ❖ One-piece unit, compact, stitching on the top, plug and play and interactive (except SEASON model).

RANGE

- With 6 models available, the FREETIME® range handles air flows from 100 to 3 500 m³/h.

The FREETIME® range is available in 4 different versions :

SEASON: unit to use in temperated climate zones, intended for air circulation in buildings with energy recovery, bypass summer/winter mode, adjustable air flow by potentiometer.

FIRST: self-regulating unit to use in temperated climate zones with active temperature management for optimal energy consumption and climatic comfort.

PREMIUM BC: Same as FIRST version, but equipped with hot water heater for exterior temperatures until -20°C.

PREMIUM BE: Same as FIRST version, but equipped with an electric heater for exterior temperatures until -20°C.

CONFIGURATION

- Double-skin 10/10ths panels.
- ❖ Insulation : 25 mm high-density M0 A2-S1 mineral wool (T3 and L2 class for airtightness of the building envelope as specified by EN1886) for the 500 and 800 models, 50 mm high-density M0 A1 mineral wool (T2 and L1 class for airtightness of the building envelope as specified by EN1886) for the 1500, 2000, 2700 et 3500 sizes.
- External surface : RAL 7035 coated steel with protective film.
- Internal surface : galvanised steel.
- ❖ Circular connectors with lip joints to guarantee sealing system (ATEC CSTB no. 13-224-12). Top-plugged connectors.
- Feet mounted in the body to fix them to the floor.
- ❖ Electrical components and controls grouped in "EASY" technique compartment. Access via opening panels for ease of maintenance. Fixed rapid-access panel on top containing lockable proximity switch, potentiometers (SEASON version) and power cable guide.
- ❖ Access to filters and internal components via hinged (châssis) on locked doors.
- Soundproof panel on ventilator fan ensures comfortable noise level.

MOTOVENTILATORS

- ❖ Plug fans.
- ❖ High-efficiency, direct-drive DC motors with electronic thermal protection and variable speed built-in. EC technology is an ecological solution that guarantees low energy consumption (RT2012) for the management, monitoring and control of the operating point (flow adjustment between 10 and 100%). Low noise level for the best acoustic comfort.

DOUBLE FLOWUNIT DESCRIPTION

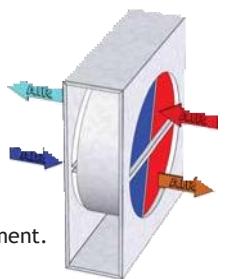
FREETIME®

EXCHANGER

- High-efficiency, **variable-speed** rotating aluminium exchanger (except **SEASON**). Exchanger in rigid frame, assembled on sliding rails to ease a removal or maintenance.
- ❖ ease of removal and maintenance. Rotary air exchangers - air products by Klingenburg, which is a member of the **Eurovent** certification program for AARE units.
- ❖ Over 80% efficiency (EN 308).
- The exchanger's variable speed enables improved performance from the **FREETIME®** unit, particularly in mid-season.
- ❖ The exchanger includes a rotary speed detector connected to the **EASY** controller to indicate operational status (dry contact in **SEASON** version).



INTEGRATED EXCHANGER



FILTERS

- ❖ As standard, the **FREETIME®** unit has a high-efficiency (large filtration surface) F7 opacimetric filter for fresh air and a G4 gravimetric filter for extracted air.
- Filters are always fitted upstream from components to ensure that they are protected.
- Assembled on sliding rails for ease of replacement.

EQUIPMENT, EXTRAS AND FUNCTIONALITY

- ❖ The **FIRST** and **PREMIUM** versions are fitted as standard with an **"EASY"** controller, which can communicate via MODBUS, BACNET or WEB (select protocol on website). EASY control is integrated into the unit and meets the requirements of our **BLUETECH®** concept, which guarantees optimal operation of the **FREETIME®** unit, that fulfills every French (RT2012) and European (ErP) requirements and contributes through its efficiency to active building management (EN15232).

It includes a touchscreen remote control with an interface and user screen for the main functions (temperature control, restart, fault, etc.) and a maintenance interface to access to general settings (remote control until 100 m away).

- Internal clocks ensuring double flow operation, which are programmable on Caladair's website (except **SEASON**).
- Weekly timer, weekend and public holiday timer (excluding **SEASON**).
- ❖ Pressure sensor detects dirty fresh air filter and notifies faults to control panel (dry contact in **SEASON** version).
- Pressure sensor checks air flow at each fan and notifies faults to control panel (dry contact in **SEASON** version)
- ❖ Lockable proximity switch integrated on the top panel.
- ❖ The **EASY** controller (except **SEASON**) ensures the optimal operation and performance of the **FREETIME®** unit via its integrated temperature sensors :

Outside air sensor

Building ambient air temperature (on extraction) sensor

Injected air sensor

EASY control enables optimal energy input from fresh air and ensures the following econologic® functions :

- **FREE COOLING:** Mainly in summer, if the exterior temperature is lower than the interior temperature and the **FREETIME®** unit (excluding **SEASON**) is in cooling mode, the rotating exchanger slows and runs adaptively until stopping completely in order to bring cool air from outside into the building. If this operation is not enough to reach the temperature instruction, the cooling unit will start up.

- **FREE HEATING:** Mainly in mid-season, if the exterior temperature is higher than the interior temperature and the **FREETIME®** unit (excluding **SEASON**) is in heating mode, the rotating exchanger slows and runs adaptively until stopping completely in order to bring warm air from outside into the building. If this operation is not enough to reach the temperature instruction, the heating unit will start up.



- **COLD RECOVERY:** In summer or in mid-season, if the exterior temperature is higher than the interior temperature and the **FREETIME®** unit (excluding **SEASON**) is in cooling mode, the rotating exchanger starts and runs adaptively until reaching its nominal speed, in order to prevent warm exterior air from entering directly. If this operation is not enough to reach the set point temperature, the cooling unit will start up.

In the **SEASON** version, the cold recovery mode will be active when the exterior temperature reaches 24°C (adjustable).

- **HEAT RECOVERY :** In winter or mid-season, if the exterior temperature is lower than the interior temperature and the **FREETIME®** unit (excluding **SEASON**) is in heating mode, the rotating exchanger starts and runs adaptively until reaching its nominal speed, in order to prevent cold exterior air from entering directly. If this operation is not enough to reach the temperature instructions, the heating unit will start up.

In the **SEASON** version, the heat recovery mode will be active when the exterior temperature is lower than 18°C (adjustable).

- **NIGHT COOLING :** The night cooling function (except **SEASON**) allows the building's interior temperature to be lowered according to climate conditions over the preceding 24 hours. Thus, between midnight and 7am (period is adjustable) the night cooling function activates if the exterior temperature has exceeded 22°C (adjustable) during the day (between 6am and 10pm). Night cooling operates if the exterior temperature is between 10 et 18°C (adjustable) and the extraction temperature is higher than 18°C (adjustable).

⇒ In addition, this function includes a ventilation instruction specific to the selected air flow in **FIRST** and **PREMIUM** versions equipped of the **EASY** controller.

FIRE SAFETY: As standard, the **FREETIME®** unit (excluding **SEASON**) includes a fire safety device that can control the injection and extraction fans in 5 different modes, available via the settings (function to be activated on website).

“Stop”: Shuts down the unit completely.

“Run”: Starts up or runs the unit at high speed; the fire safety function will take priority over all other alarms.

“Auto”: Runs the unit according to the on-site settings (Stop/Slow/Fast).

“Run Injection”: Starts up or runs the injection fans at high speed (extraction stopped).

“Run Extraction”: Starts up or runs the extraction fans at high speed (injection stopped).

Whichever mode is selected, the **EASY** control screen will display “Fire Alarm” when this function is activated.

The **FREETIME®** unit also includes an “External Stop” digital port which allows a manual controller to be connected on site.

In this case, the external controller takes priority over any fire safety activated by any of the 5 modes listed above.

AIR FLOW MODULATION

⇒ 6 air flow options to guarantee optimal energy consumptions (RT2012, EN15232).

SEASON: Each fan's rotation speed can be adjusted using potentiometers plugged and wired to the unit's top panel.

- In the **FIRST** and **PREMIUM** versions, the **EASY** controller can pilot fans in the following modes :

ECO: Rotation speed of each fan can be adjusted by altering the two flows (low-speed/high-speed) in the **EASY** controller.

LOBBY®: air flow at **CONSTANT PRESSURE**, adjustable for each fan (**FIRST** and **PREMIUM**).

DIVA®: Proportional flow adjustment of each fan according to CO₂ level. Sensor integrated into the unit's extraction duct.

MAC2®: **CONSTANT FLOW** modulation of each fan (low & high speed) excluding 500 and 800 models. Pressure transmitters integrated into the unit.

QUATTRO®: **CONSTANT FLOW** modulation of each fan according to CO₂ level (excluding 500 and 800 models). Pressure transmitters and CO₂ sensor (in extraction duct) integrated into the unit. Low speed, high speed and CO₂ (ppm) can be adjusted on site by the **EASY** controller.

INSTALLATION

- ⇒ Indoor for closet or machine room.
- ⇒ Compact design, plugged connectors via circular with seal for easy, quick, airtight and economical installation (no adapters).

CLIMATE VERSIONS

⇒ The **FREETIME®** unit includes the **PREMIUM BC** (integrated hot water heat) and **PREMIUM BE** (integrated electric heating) ensuring optimal use in winter until -20°C (excluding **SEASON**).

These functionalities are automatically managed by the “**EASY**” controller.

⇒ Additionally, and ensuring climatic comfort in all seasons and the **FREETIME®** unit (excluding **SEASON**) can be linked to a cooling or dehumidifying module:

- The **COMBIBOX CONCEPT®** cold water (CBX-BF) module on all versions and can be used for changeover on the **FIRST** version.

- Direct expansion module CBX-DX to R410A.

- Dehumidification module only on the **FIRST** version.

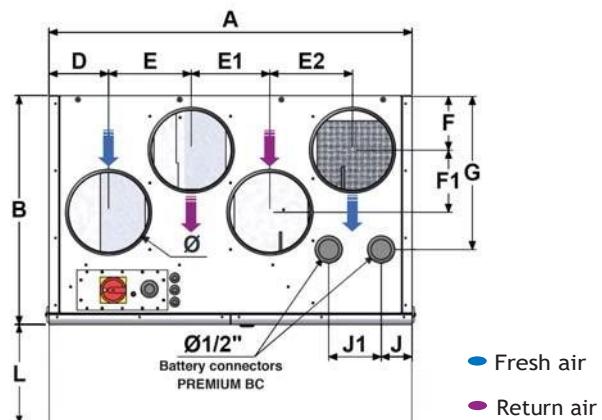
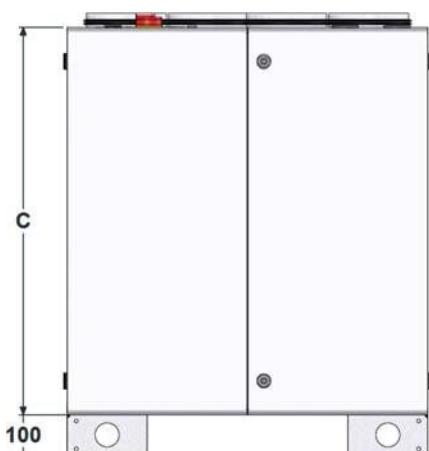
⇒ The “**EASY**” controller integrated into the **FREETIME®** unit enables management of these thermal modules.

⇒ The dehumidification function (to be activated on site) consists in linking the **FREETIME®** unit to a **COMBIBOX CONCEPT®** module equipped with a cooling unit (water or cold DX only) plus a heating unit (water or electric). In this case, the controller will automatically manage the hot or cold supply necessary for dehumidification while maintaining an optimal operating temperature. When in cooling mode, temperature management takes priority over dehumidification.

COMBIBOX CONCEPT® EXTERNAL MODULE

Versions	HEATING		REFRESH Cold Only		DEHUMIDIFYING Cold + Warm			
	Electric	Water	Water	R410A	Water/Water	Water/Elec	R410A/Water	R410A/Elec
SEASON	-	-	-	-	-	-	-	-
FIRST	-	-	CBX-BF	CBX-DX	CBX-FH	CBX-FE	CBX-DXH	CBX-DXE
PREMIUM BE	✓	-	CBX-BF	CBX-DX	-	-	-	-
PREMIUM BC	-	✓	CBX-BF	CBX-DX	-	-	-	-

FREETIME® model	Ø	A	B	C	D	E	E1	E2	F	F1	G	J	J1	L	SEASON FIRST	PREMIUM BE PREMIUM BC
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
500	200	900	570	970	145	205	195	205	135	155	385	75	130	520	130	135
800	250	1080	700	1090	170	235	240	260	160	235	485	75	180	650	170	175
1500	315	1400	750	1140	230	315	310	315	210	190	585	100	230	720	225	232
2000	355	1500	830	1220	250	335	330	335	230	230	660	100	230	770	270	278
2700	400	1610	920	1420	270	345	345	375	250	290	755	100	230	820	345	355
3500	450	1730	1085	1420	300	365	370	400	275	390	795	100	305	980	420	432

ELECTRICAL CHARACTERISTICS **FREETIME®**

FREETIME® model	Electrical power (W)	Usage temp. (°C / °C)	Protection index Class	Thermal cutout *	SEASON/FIRST & PREMIUM BC		PREMIUM BE	
					Power supply voltage (V / Ph / Hz)	Protection current (A)	Power supply voltage (V / Ph / Hz)	Protection current (A)
500	2 x 169 W	-20 / 60	IP54 / B	PTI	230 / 1 / 50	3,8	230 / 1 / 50	14,7
800	2 x 220 W	-20 / 60	IP44 / B	PTI	230 / 1 / 50	4,1	230 / 1 / 50	20,4
1500	2 x 750 W	-20 / 40	IP54 / B	PTI	230 / 1 / 50	7,6	230 / 1 / 50	30,4
2000	2 x 750 W	-20 / 40	IP54 / B	PTI	230 / 1 / 50	7,6	400 / 3+N / 50	18,5
2700	2 x 1000 W	-20 / 50	IP54 / B	PTI	400 / 3+N / 50	4,3	400 / 3+N / 50	23,8
3500	2 x 1000 W	-20 / 50	IP54 / B	PTI	400 / 3+N / 50	4,3	400 / 3+N / 50	28,1

*PTI: Integrated thermal cutout

- The "Lp4m dB(A)" curves indicate the sound pressure level measured at 4m, in free field conditions, with hemispherical distribution on a reflecting plane, disconnecting the exterior "fresh air intake" and "stale air expulsion" ducts and connecting the interior "fresh air injection" and "stale air extraction" ducts.
- To obtain the overall sound pressure level Lp dB(A), at a given distance, add the values below to Lp4m :

Distance (m)	1,5	3	4	5	7	10
Distance weighting dB(A)	9	3	0	-2	-5	-8

NOTA: Tolerance =
Global Values + / - 3 dB(A)
Acoustic spectra +/- 5 dB(A)

- The "LW fresh air injection dB(A)" curves indicate overall sound power emitted at the "fresh air injection" duct.
- To obtain the "LW fresh air injection dB(A)" sound power spectrum at the "fresh air injection" duct, add the values below to the "LW fresh air injection" sound power taken from the curves.

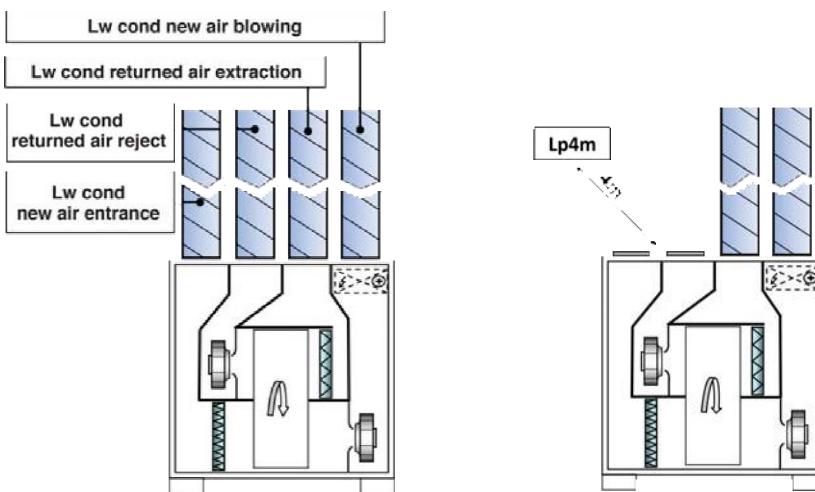
Frequency	Downstream acoustic spectrum weighting function "Lw cond blower dB(A)" Indicated on the curves							
	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
Weighting Freetime 500 dB(A)	-22	-14	-9	-6	-6	-8	-12	-12
Weighting Freetime 800 dB(A)	-18	-8	-7	-7	-7	-9	-16	-20
Weighting Freetime 1500 dB(A)	-20	-11	-6	-8	-6	-9	-14	-19
Weighting Freetime 2000 dB(A)	-20	-15	-9	-8	-6	-6	-13	-17
Weighting Freetime 2700 dB(A)	-23	-14	-8	-9	-5	-7	-11	-15
Weighting Freetime 3500 dB(A)	-26	-18	-12	-10	-4	-6	-10	-13

- The "LW stale air extraction dB(A)" curves indicate overall sound power radiated at the "stale air extraction" and "fresh air injection" ducts.
- To obtain the "LW stale air extraction dB(A)" sound power spectrum at the "stale air extraction" and "fresh air injection" ducts, add the values below to the "LW stale air extraction" sound power taken from the curves.

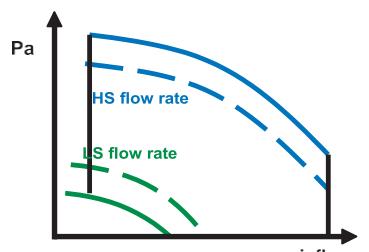
Frequency	Upstream acoustic spectrum weighting function "Lw cond extraction dB(A)" Indicated on the curves							
	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
Weighting Freetime 500 dB(A)	-33	-24	-13	-7	-5	-5	-12	-15
Weighting Freetime 800 dB(A)	-22	-12	-7	-5	-6	-10	-16	-24
Weighting Freetime 1500 dB(A)	-21	-14	-7	-6	-6	-8	-13	-21
Weighting Freetime 2000 dB(A)	-26	-19	-8	-5	-6	-8	-12	-20
Weighting Freetime 2700 dB(A)	-26	-16	-7	-6	-8	-6	-12	-18
Weighting Freetime 3500 dB(A)	-30	-19	-9	-7	-7	-5	-10	-16

- To obtain the "NSC4 dB(A)" sound pressure (sound level measured at 4m, in free field conditions, with hemispherical distribution, placing the appliance on the floor on a reflecting plane, with its inlet and outlet ducts connected to ducts having the same sound insulation properties), add the value from the table below to the "Lp4m" value read from the curves.

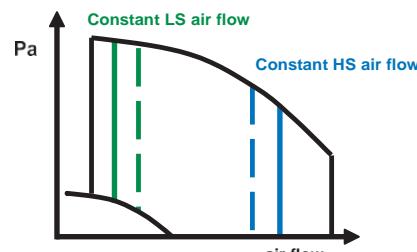
Acoustic weighting for the value NSC 4 dB (A) depending on the Lp4m value indicated on the curve					
Freetime 500	Freetime 800	Freetime 1500	Freetime 2000	Freetime 2700	Freetime 3500
-18	-18	-19	-20	-20	-21



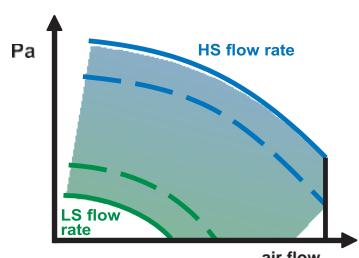
NOTA : the curves are created on the basis of new air (Static Pressure) all pressure gauges connected (configuration D in accordance with regulation NF EN 13141-4)

**FREETIME® ECO / SEASON operation**

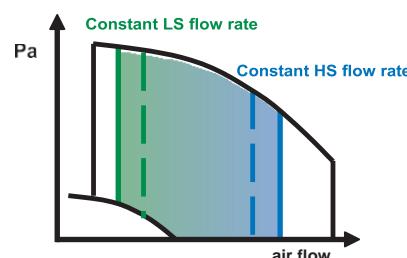
1 or 2 air flows as required (Low Speed(LS)/High speed(HS)) per fan
Except SEASON, 1 flow adjustable by potentiometer

**FREETIME®+ MAC2 operation**

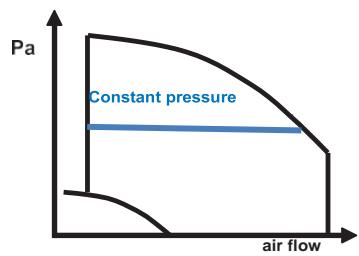
Optional 1 or 2 CONSTANT air flows by fan (except Freetime® 500 and 800)

**FREETIME®+ DIVA operation**

PROPORTIONAL ventilation between two air flows (LS/HS) by fan

**FREETIME®+ QUATTRO operation**

PROPORTIONAL ventilation between two CONSTANT air flows by fan
(except Freetime® 500 and 800)

**FREETIME®+ LOBBY® operation**

CONSTANT PRESSURE ventilation by fan



Touchscreen (EXCEPT SEASON)
with user interfaces and screen
and / or maintenance interface
(Up to 100 m)



ECONOLOGICAL SOLUTIONS®

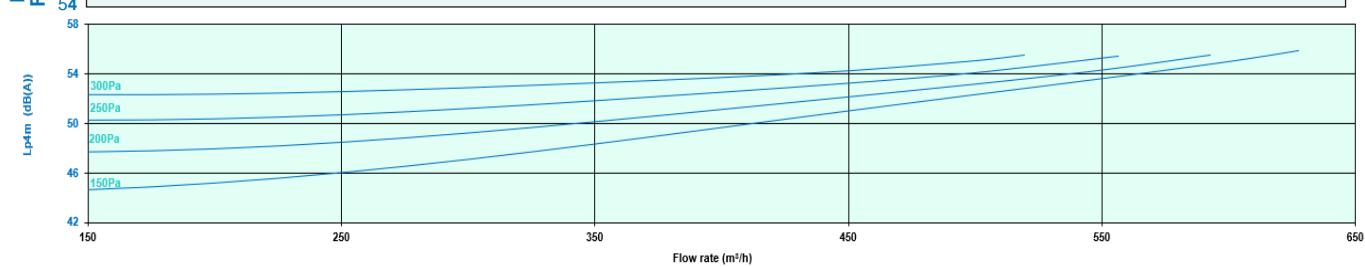
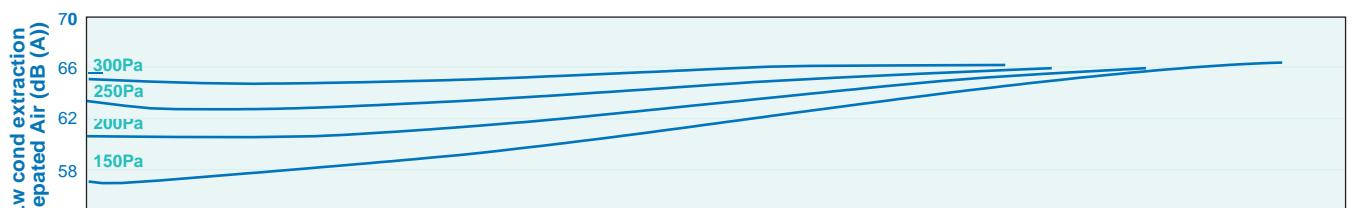
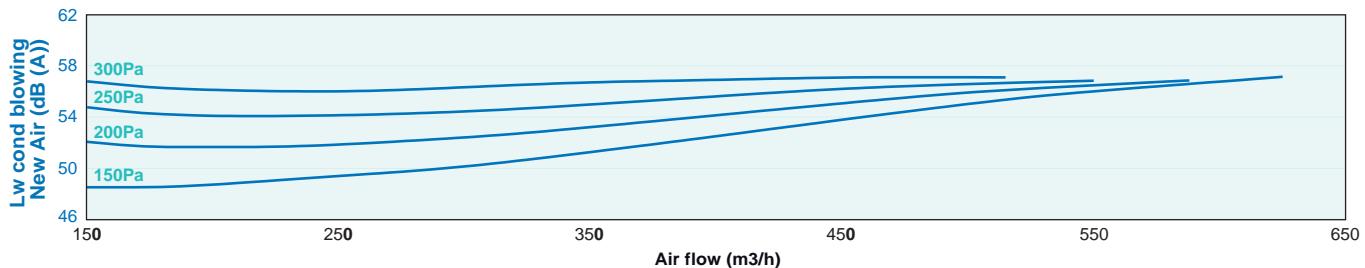
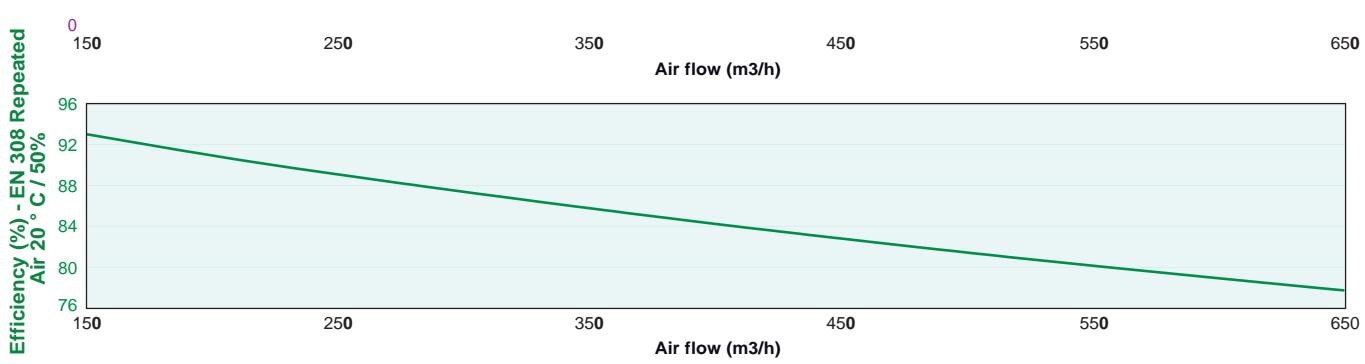
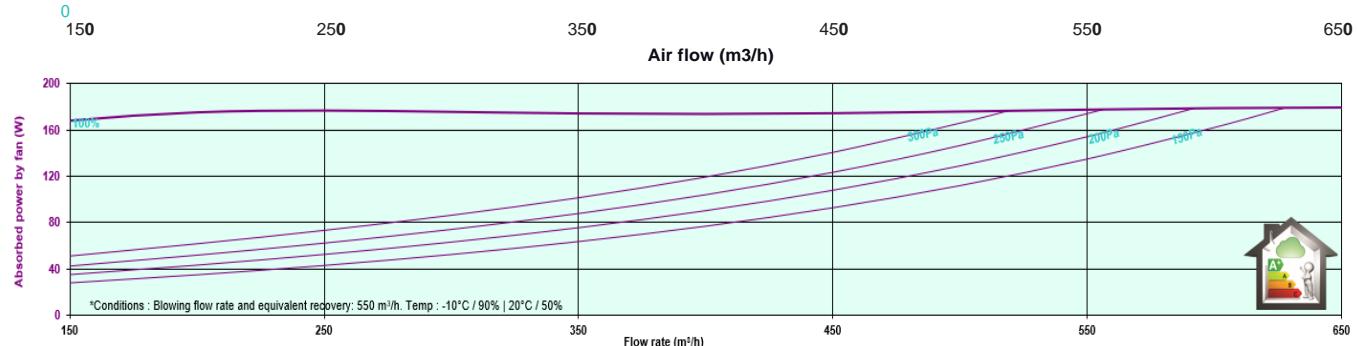
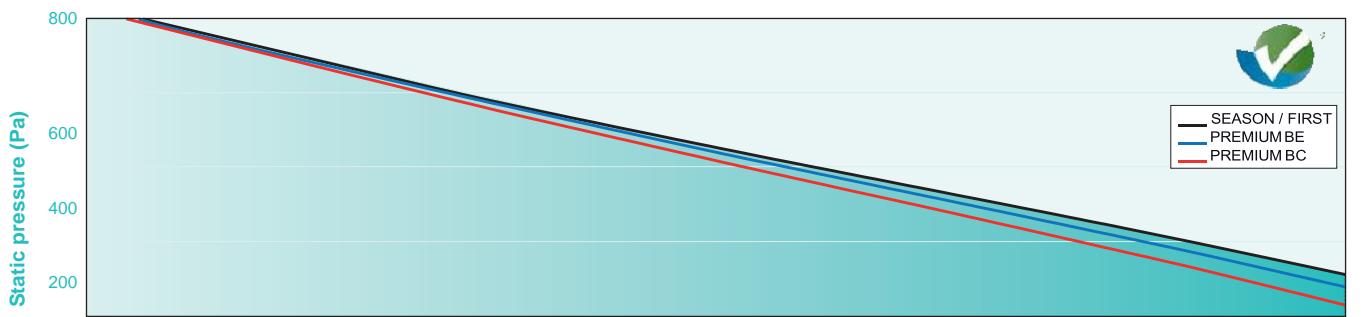


EQUIPMENT	SEASON	FIRST	PREMIUM BE	PREMIUM BC
Low-consumption EC fans	●	●	●	●
Fresh air filter, opacimetric F7	●	●	●	●
Extraction filter, gravimetric G4	●	●	●	●
High-efficiency (>80%) rotating exchanger, EUROVENT certified	●	●	●	●
Variable-speed exchanger	●	●	●	●
Double skin 50 mm RAL7035 (except 500 & 900 = 25 mm)	●	●	●	●
Circular connectors with lip joints (ATEC CSTB no. 13-224-12)	●	●	●	●
Touchscreen remote control (up to 100m)	-	●	●	●
Control protocols - MODBUS or BACNET via RS485 or TCP/IP or WEB (select in menu)	-	●	●	●
Control fan speed (LO - HI) using EASY controller	-	●	●	●
Fan speed adjustment potentiometers	●	-	-	-
Supply temperature sensor	-	●	●	●
Extraction temperature sensor	-	●	●	●
Exterior temperature sensor	●	●	●	●
Frost protection thermostat on water heating unit	-	-	-	●
Safety thermostat on electric heating unit	-	-	●	-
Exchanger rotation sensor	●	●	●	●
Lockable proximity switch	●	●	●	●
Power cable guide	●	●	●	●
FUNCTIONS	SEASON	FIRST	PREMIUM BE	PREMIUM BC
Self-regulating electric heating unit	-	-	●	-
Self-regulating water heating unit	-	-	-	●
Optimised free cooling	-	●	●	●
Optimised free heating	-	●	●	●
Managed night cooling (night-time overventilation)	-	●	●	●
Optimised cold recovery	-	●	●	●
Thermostatic control of cold recovery (adjustable)	●	-	-	-
Optimised heat recovery	-	●	●	●
Thermostatic control of heat recovery (adjustable)	●	-	-	-
Supply temperature management (air legislation)	-	●	●	●
Ambient temperature management (extraction)	-	●	●	●
Weekly timer	-	●	●	●
Weekend and public holiday timer	-	●	●	●
Dirty fresh air filter pressure sensor	●	●	●	●
Airflow monitoring pressure sensors (injection & extraction)	●	●	●	●
Fire safety with 5 available modes	-	●	●	●
Managed COMBIBOX CONCEPT® cooling module (water or R410A)	-	●	●	●
Managed COMBIBOX CONCEPT® dehumidification module	-	●	●	●
FACTORY-FITTED OPTIONS	SEASON	FIRST	PREMIUM BE	PREMIUM BC
LOBBY®: air flow at CONSTANT PRESSURE	-	○	○	○
DIVA®: proportional flow adjustment by CO ₂ level	-	○	○	○
MAC2: CONSTANT FLOW adjustment	-	○	○	○
QUATTRO EC: proportional adjustment by CO ₂ level between 2 CONSTANT FLOWS	-	○	○	○
ON-SITE OPTIONS	SEASON	FIRST	PREMIUM BE	PREMIUM BC
COMBIBOX CONCEPT® cooling module (water or R410A)	-	◆	◆	◆
COMBIBOX CONCEPT® dehumidification module	-	◆	◆	◆
Changeover chip for switching hot/cold	-	◆	◆	◆
LON protocol communications	-	◆	◆	◆
Ambient temperature control via touchscreen remote control	-	◆	◆	◆
WONDERROOM zone controller communicating automatically with the FREETIME®	-	◆	◆	◆

● : Standard equipment or functions.

○ : OPTIONAL equipment or functions. Supplied assembled and cabled at the factory

◆ : OPTIONAL equipment or functions. Supplied unassembled

**FREETIME® 500**

FREETIME® 500

Hot water coil - PREMIUM BC

Water temp. (°C)	Air inlet temp. (°C)	Air flow (m³/h)	100	200	300	400	500	600
80/60	11	Motor (kW)/Air outlet temp (°C) 1,6 / 56,7	2,6 / 48,7	3,4 / 43,9	4,0 / 40,5	4,6 / 38	5,1 / 36	
		Water flow(l/h)/DP water (kPa)	69 / 1,3	113 / 3,2	148 / 5,2	177 / 7,3	202 / 9,2	225 / 11,2
60/50	15	Motor (kW)/Air outlet temp (°C) 1,5 / 57,6	2,4 / 50	3,1 / 45,6	3,8 / 42,4	4,3 / 40,1	4,8 / 38,2	
		Water flow(l/h)/DP water (kPa)	64 / 1,2	105 / 2,8	137 / 4,6	164 / 6,4	188 / 8,1	209 / 9,8
45/40	11	Motor (kW)/Air outlet temp (°C) 1,2 / 45	1,9 / 39,2	2,5 / 35,7	3,0 / 33,3	3,5 / 31,4	3,9 / 29,9	
		Water flow(l/h)/DP water (kPa)	101 / 2,8	168 / 6,9	220 / 11,4	265 / 15,8	303 / 20,2	337 / 24,5
	15	Motor (kW)/Air outlet temp (°C) 1,1 / 45,9	1,8 / 40,6	2,3 / 37,4	2,8 / 35,2	3,2 / 33,5	3,5 / 32,1	
		Water flow(l/h)/DP water (kPa)	92 / 2,3	152 / 5,8	200 / 9,5	240 / 13,2	275 / 16,9	306 / 20,5
	11	Motor (kW)/Air outlet temp (°C) 0,8 / 35,2	1,4 / 31,2	1,8 / 28,8	2,2 / 27,0	2,5 / 25,7	2,8 / 24,7	
		Water flow(l/h)/DP water (kPa)	143 / 5,4	239 / 13,7	315 / 22,6	379 / 31,7	435 / 40,6	485 / 49,4
	15	Motor (kW)/Air outlet temp (°C) 0,7 / 36,1	1,2 / 32,6	1,6 / 30,5	1,9 / 21,3	2,2 / 27,8	2,4 / 26,9	
		Water flow(l/h)/DP water (kPa)	125 / 4,3	208 / 10,7	274 / 17,6	330 / 24,6	378 / 31,5	421 / 38,3

FREETIME® 500

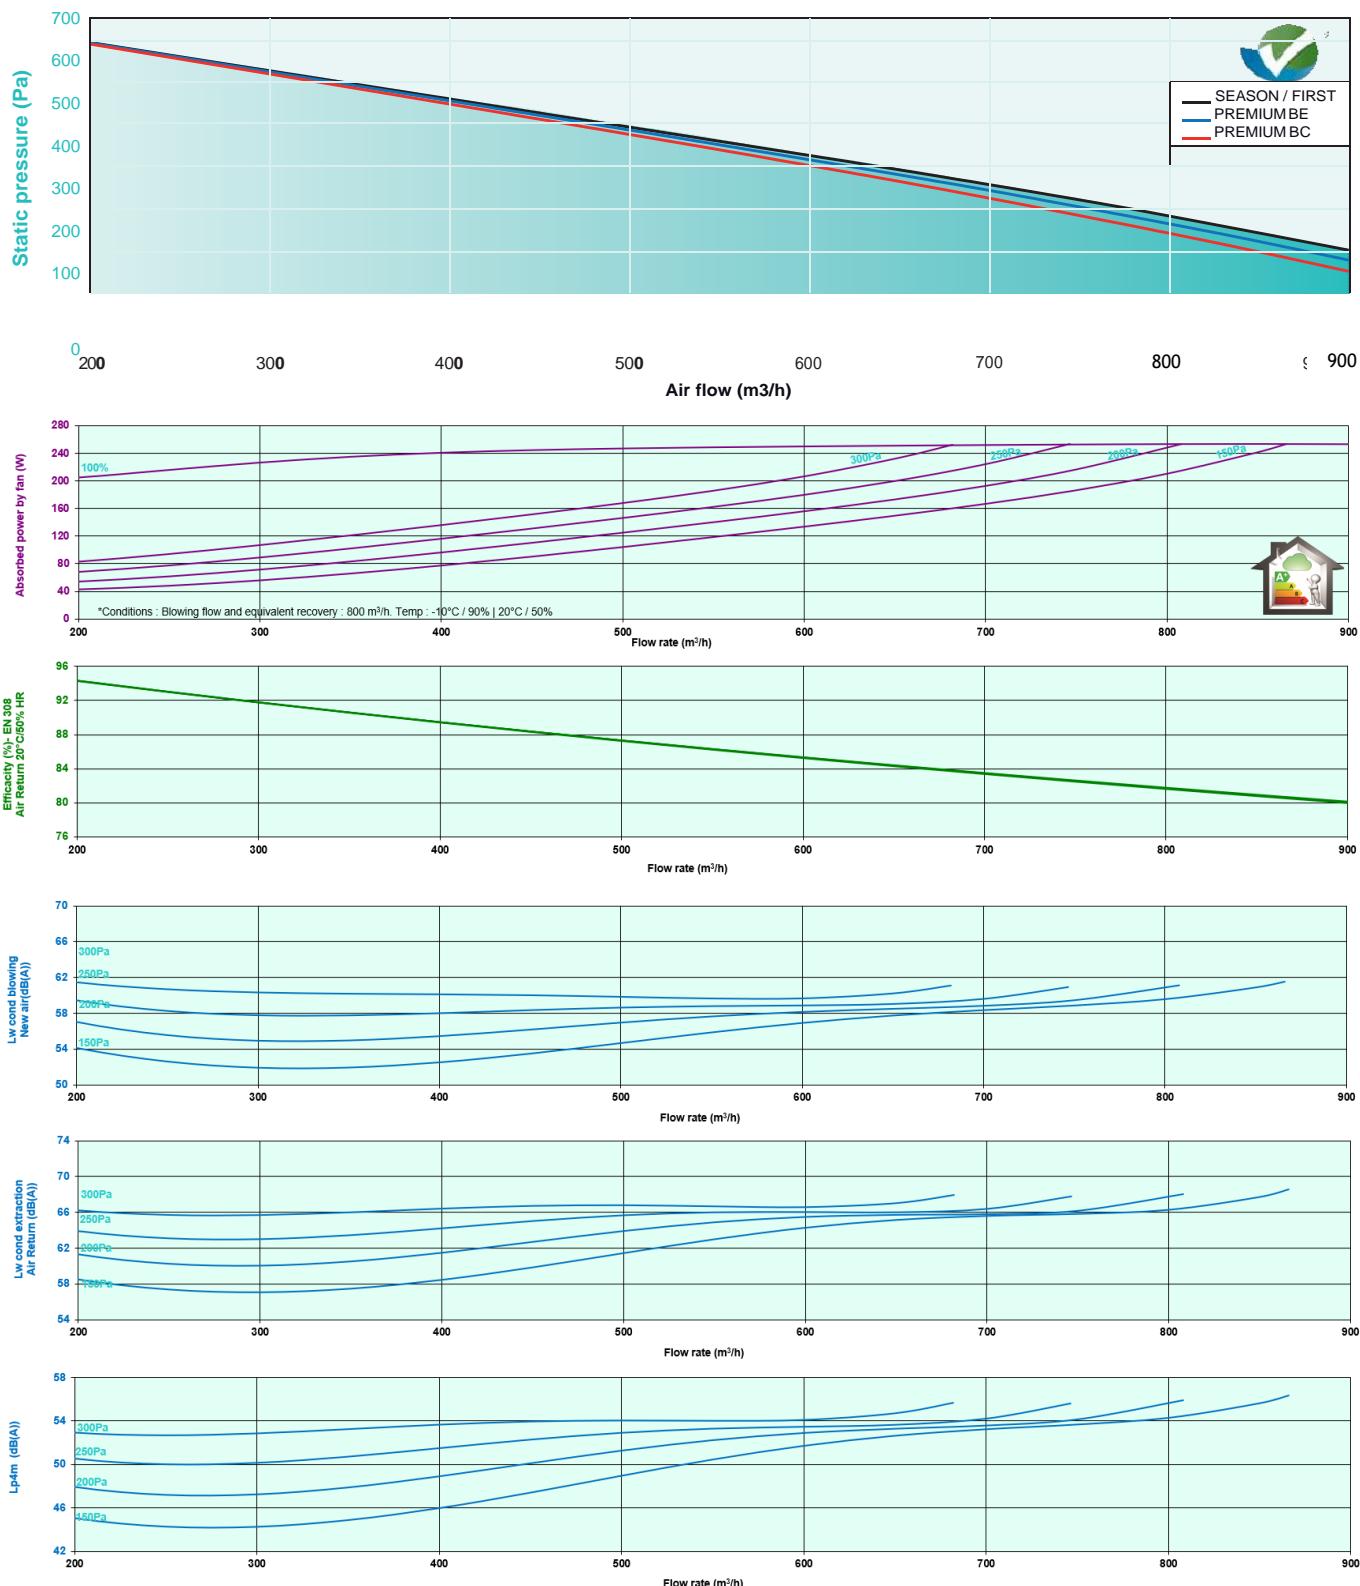
Electric coil - PREMIUM BE

Fresh air Air flow (m³/h)	0°C 500	-5°C 500	0°C 500	-5°C 500	-10°C 500	-15°C 500	-20°C 500
Version	FIRST-SEASON				PREMIUM BE		
					Heating coil		
Total power kW		-			2,5		
Temp.°Con output from the unit	16,2	15,3	31,2	30,3	29,3	28,3	27,3





FREETIME® 800



FREETIME® 800

Hot water coil - PREMIUM BC

Water temp. (°C)	Air inlet temp. (°C)	Air flow (m³/h)	200	300	400	500	600	700	800
80/60	11	Motor (kW)/Air outlet temp (°C) 3,0/54,8	4,0 / 50	4,9 / 46,7	5,6 / 44	6,3 / 41,9	7 / 40,1	7,6 / 38,6	
		Waterflow(l/h)/DPwater (kPa) 131 / 1	175 / 1,6	214 / 2,3	247 / 3	278 / 3,8	306 / 4,5	331 / 5,2	
	15	Motor (kW)/Air outlet temp (°C) 2,8/55,7	3,7 / 51,3	4,5 / 48,2	5,2 / 45,7	5,9 / 43,7	6,5 / 42,1	7 / 40,7	
		Waterflow(l/h)/DPwater (kPa) 122 / 0,8	163 / 1,4	199 / 2	230 / 2,7	258 / 3,3	284 / 3,9	307 / 4,5	
60/50	11	Motor (kW)/Air outlet temp (°C) 2,2/43,6	3,0 / 40,3	3,7 / 37,8	4,3 / 35,9	4,8 / 34,3	5,3 / 33	5,7 / 31,9	
		Waterflow(l/h)/DPwater (kPa) 194 / 2,1	261 / 3,5	319 / 5,1	370 / 6,6	416 / 8,2	459 / 9,8	498 / 11,4	
	15	Motor (kW)/Air outlet temp (°C) 2,0/44,6	2,7 / 41,5	3,3 / 39,3	3,9 / 37,6	4,3 / 36,1	4,8 / 35	5,2 / 33,9	
		Waterflow(l/h)/DPwater (kPa) 176 / 1,7	237 / 2,9	289 / 4,2	335 / 5,5	377 / 6,9	415 / 8,2	450 / 9,5	
45/40	11	Motor (kW)/Air outlet temp (°C) 1,6/34,3	2,2 / 32,0	2,6 / 30,3	3,1 / 28,9	3,5 / 27,8	3,8 / 26,9	4,1 / 26,1	
		Waterflow(l/h)/DPwater (kPa) 276 / 4,1	372 / 7,0	456 / 10,1	530 / 13,3	597 / 16,5	659 / 19,8	715 / 23	
	15	Motor (kW)/Air outlet temp (°C) 1,4/35,3	1,9 / 33,3	2,3 / 31,8	2,7 / 30,6	3 / 29,6	3,3 / 28,8	3,6 / 28,1	
		Waterflow(l/h)/DPwater (kPa) 240 / 3,2	324 / 5,4	397 / 7,8	461 / 10,3	519 / 12,8	572 / 15,3	621 / 17,8	

FREETIME® 800

Electric coil - PREMIUM BE

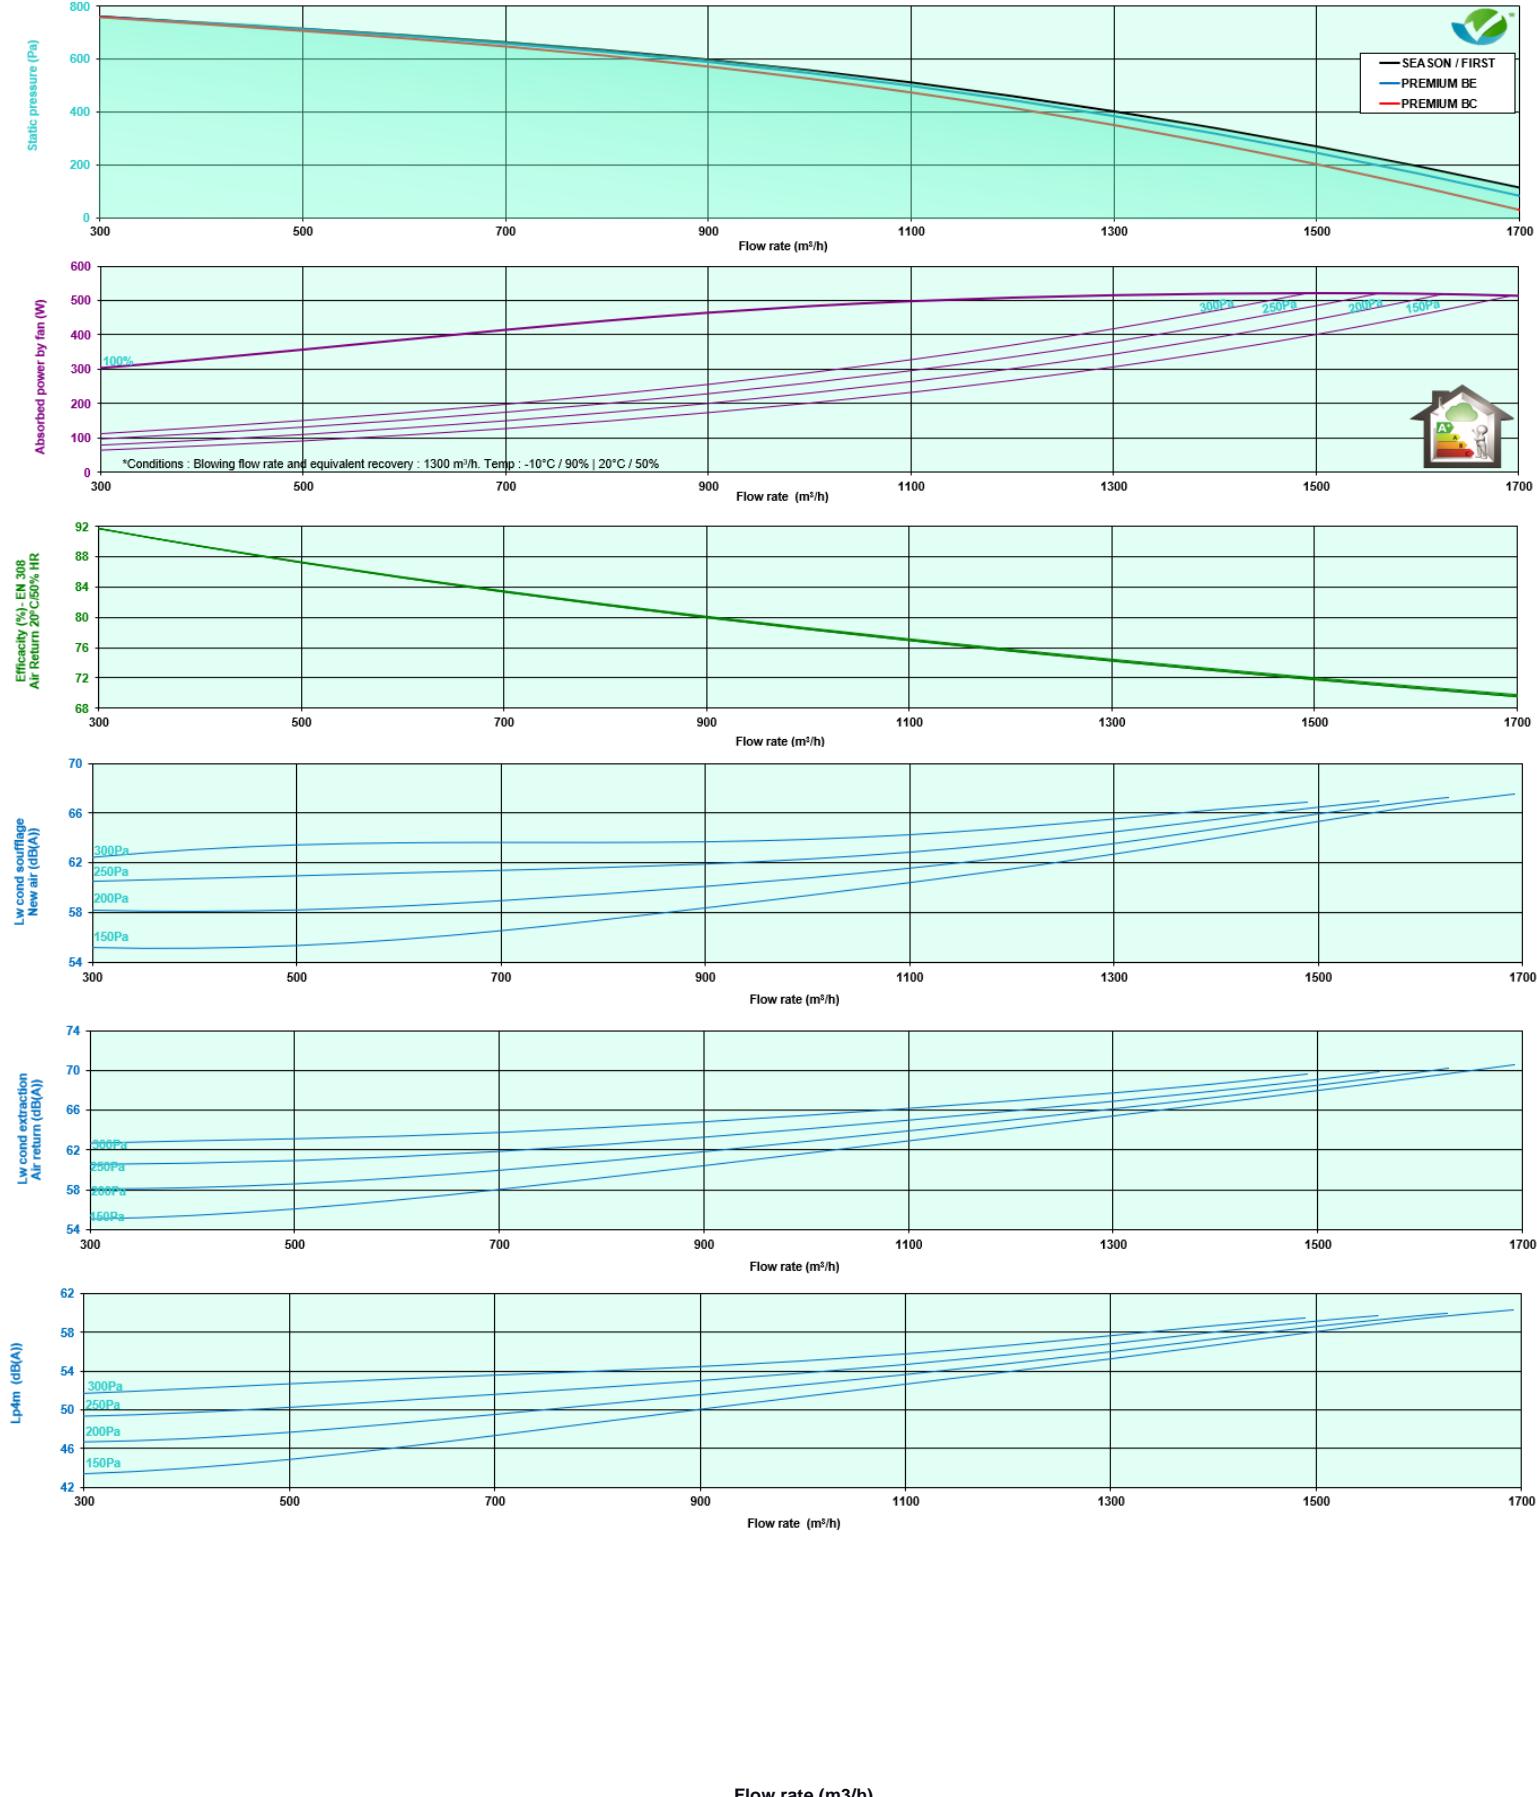
Fresh air Air flow (m³/h)	0°C 800	-5°C 800	0°C 800	-5°C 800	-10°C 800	-15°C 800	-20°C 800
Version	FIRST-SEASON				PREMIUM BE		
Total power kW					Heating coil		
Temp. °C on output from the unit	16,4	15,5	30,5	29,6	28,7	27,7	26,8





FREETIME® 1500

FREETIME® 1500



FREETIME® 1500

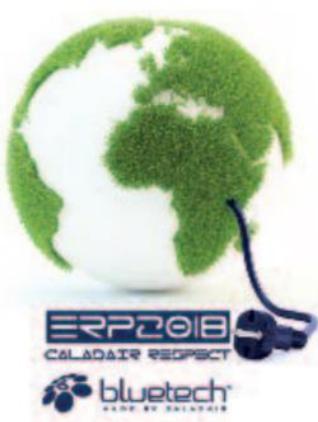
Hot water coil - PREMIUM BC

Water temp. (°C/°C)	Air inlet temp. (°C)	Air flow (m³/h)	500	700	900	1100	1300	1500	1700
80/60 11	Motor (kW)/Air outlet temp (°C) 6,4 / 48,6	8 / 44,6	9,4 / 41,7	10,7 / 39,4	11,8 / 37,5	12,8 / 36	13,7 / 34,6		
	Water flow(l/h)/DP water (kPa) 281 / 1,9	352 / 2,9	413 / 3,9	467 / 4,9	516 / 5,8	561 / 6,8	601 / 7,7		
80/60 15	Motor (kW)/Air outlet temp (°C) 6 / 49,9	7,5 / 46,2	8,8 / 43,5	9,9 / 41,3	10,9 / 39,6	11,9 / 38,1	12,7 / 36,9		
	Water flow(l/h)/DP water (kPa) 261 / 1,7	327 / 2,5	384 / 3,4	434 / 4,2	479 / 5,1	520 / 5,9	558 / 6,7		
60/50 11	Motor (kW)/Air outlet temp (°C) 4,8 / 39,2	6,1 / 36,3	7,1 / 34,2	8,1 / 32,5	8,9 / 31,1	9,7 / 29,9	10,4 / 29		
	Water flow(l/h)/DP water (kPa) 419 / 4,1	527 / 6,3	620 / 8,5	702 / 10,7	777 / 12,9	845 / 15,1	907 / 17,2		
60/50 15	Motor (kW)/Air outlet temp (°C) 4,4 / 40,6	5,5 / 37,9	6,5 / 36	7,3 / 34,4	8,1 / 33,2	8,8 / 32,1	9,4 / 31,2		
	Water flow(l/h)/DP water (kPa) 380 / 3,5	477 / 5,3	561 / 7,1	636 / 8,9	703 / 10,7	764 / 12,5	821 / 14,3		
40/40 11	Motor (kW)/Air outlet temp (°C) 3,5 / 31,2	4,4 / 29,2	5,1 / 27,7	5,8 / 26,5	6,5 / 25,5	7 / 24,7	7,6 / 24		
	Water flow(l/h)/DP water (kPa) 599 / 8,3	755 / 12,7	889 / 17,2	1009 / 21,7	1118 / 26,2	1217 / 30,6	1308 / 35		
40/40 15	Motor (kW)/Air outlet temp (°C) 3 / 32,6	3,8 / 30,8	4,5 / 29,5	5,1 / 28,5	5,6 / 27,6	6,1 / 26,9	6,6 / 26,3		
	Water flow(l/h)/DP water (kPa) 521 / 6,4	656 / 9,8	773 / 13,3	876 / 16,7	970 / 20,2	1056 / 23,6	1134 / 26,9		

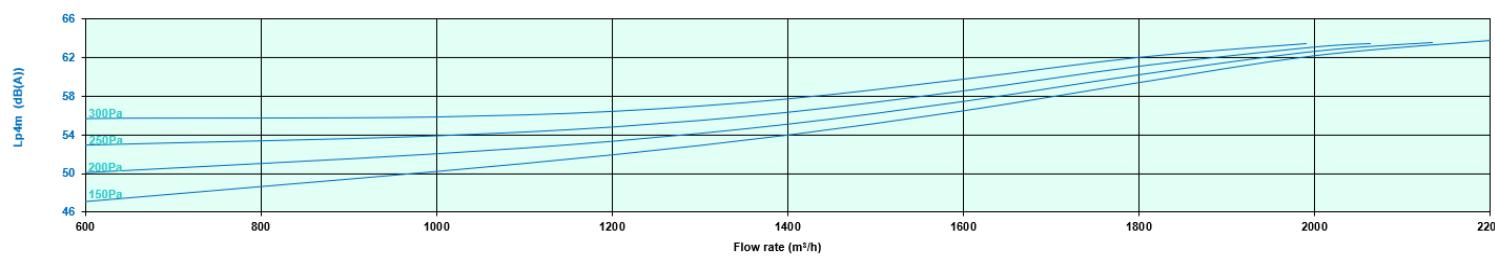
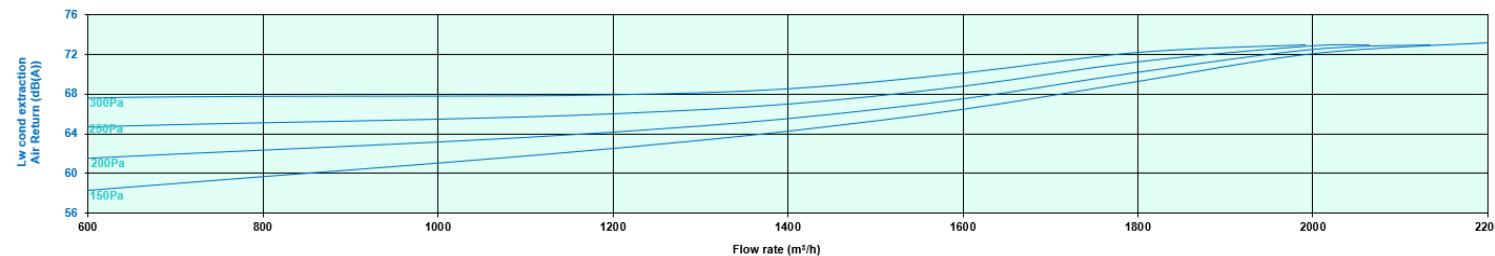
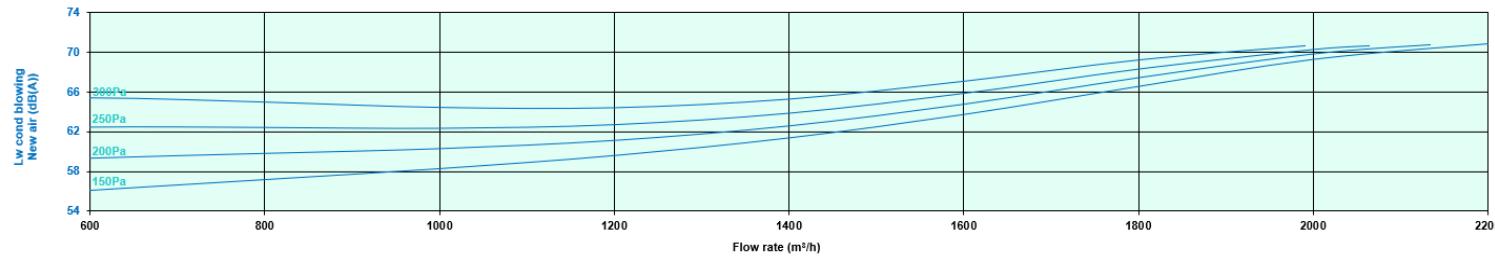
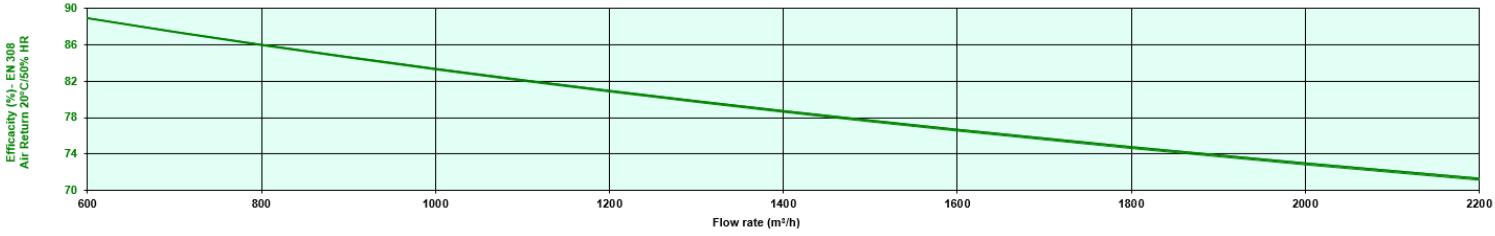
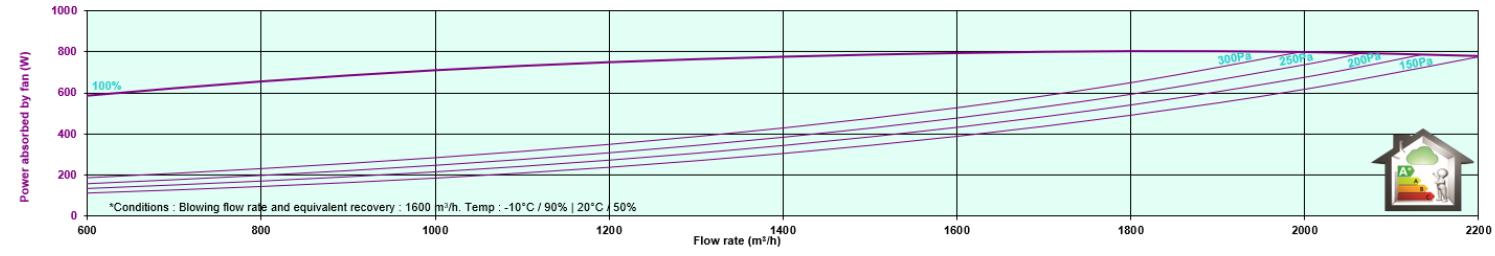
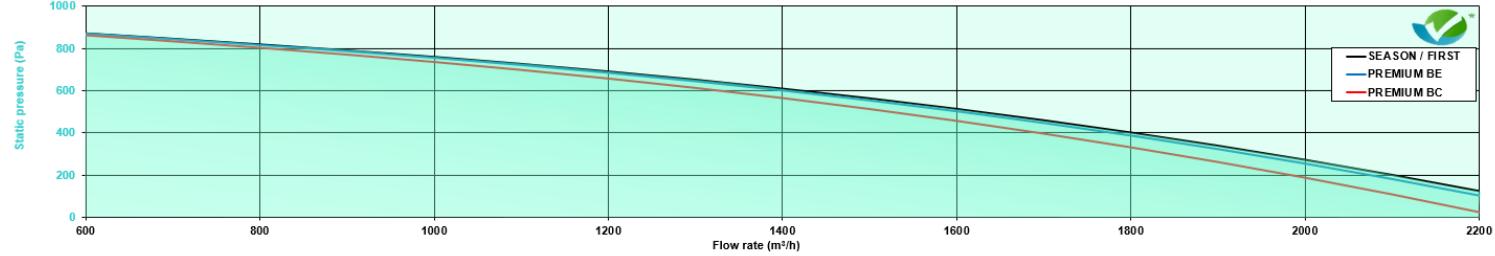
FREETIME® 1500

Electric coil - PREMIUM BE

Fresh air Air flow (m³/h)	0°C 1500	-5°C 1500	0°C 1500	-5°C 1500	-10°C 1500	-15°C 1500	-20°C 1500
Version	FIRST-SEASON				PREMIUM BE		
					Heating coil		
Total power kW		-			5,25		
Temp. °C output from the unit	14,5	13,1	25,0	23,6	22,2	20,8	19,4



ECONOLOGICAL SOLUTIONS®

**FREETIME® 2000**Flow rate (m^3/h)

FREETIME® 2000

Hot water coil - PREMIUM BC

Water temp. (°C/°C)	Air inlet temp. (°C)	Air flow (m³/h)	800	1000	1200	1400	1600	1800	2000
80/60	11	Motor(kW)/Air outlet temp (°C) 9,4/45,3	10,8 / 42,6	12,1 / 40,5	13,3 / 38,8	14,4 / 37,3	15,4 / 36	16,3 / 34,9	
		Waterflow(l/h)/DPwater (kPa) 411 / 4,1	474 / 5,4	530 / 6,6	582 / 7,8	630 / 9	674 / 10,2	715 / 11,4	
60/50	15	Motor(kW)/Air outlet temp (°C) 8,7/46,9	10 / 44,4	11,2 / 42,4	12,3 / 40,8	13,3 / 39,4	14,3 / 38,2	15,1 / 37,2	
		Waterflow(l/h)/DPwater (kPa) 382 / 3,6	440 / 4,7	493 / 5,8	541 / 6,8	585 / 7,9	626 / 8,9	664 / 10	
45/40	11	Motor (kW)/Air outlet temp (°C) 7 / 36,7	8,1 / 34,8	9,1 / 33,3	10 / 32	10,9 / 30,9	11,6 / 29,9	12,4 / 29,1	
		Waterflow(l/h)/DPwater (kPa) 612 / 9	709 / 11,7	794 / 14,4	873 / 17,2	945 / 19,9	1012 / 22,6	1075 / 25,2	
	15	Motor(kW)/Air outlet temp (°C) 6,4/38,3	7,4 / 36,6	8,3 / 35,2	9,1 / 34	9,8 / 33	10,5 / 32,1	11,2 / 31,4	
		Waterflow(l/h)/DPwater (kPa) 555 / 7,5	642 / 9,8	719 / 12	791 / 14,3	856 / 16,6	917 / 18,8	973 / 21	
	11	Motor(kW)/Air outlet temp (°C) 5,1/29,5	5,9 / 28,1	6,6 / 27	7,2 / 26,1	7,9 / 25,4	8,4 / 24,7	8,9 / 24,1	
		Waterflow(l/h)/DPwater (kPa) 875 / 17,9	1013 / 23,5	1138 / 29,1	1252 / 34,7	1358 / 40,2	1455 / 45,7	1546 / 51,1	
	15	Motor(kW)/Air outlet temp (°C) 4,4/31,1	5,1 / 29,9	5,7 / 29	6,3 / 28,2	6,8 / 27,5	7,3 / 26,9	7,8 / 26,4	
		Waterflow(l/h)/DPwater (kPa) 761 / 13,9	881 / 18,2	990 / 22,5	1089 / 26,8	1180 / 31,1	1264 / 35,3	1343 / 39,4	

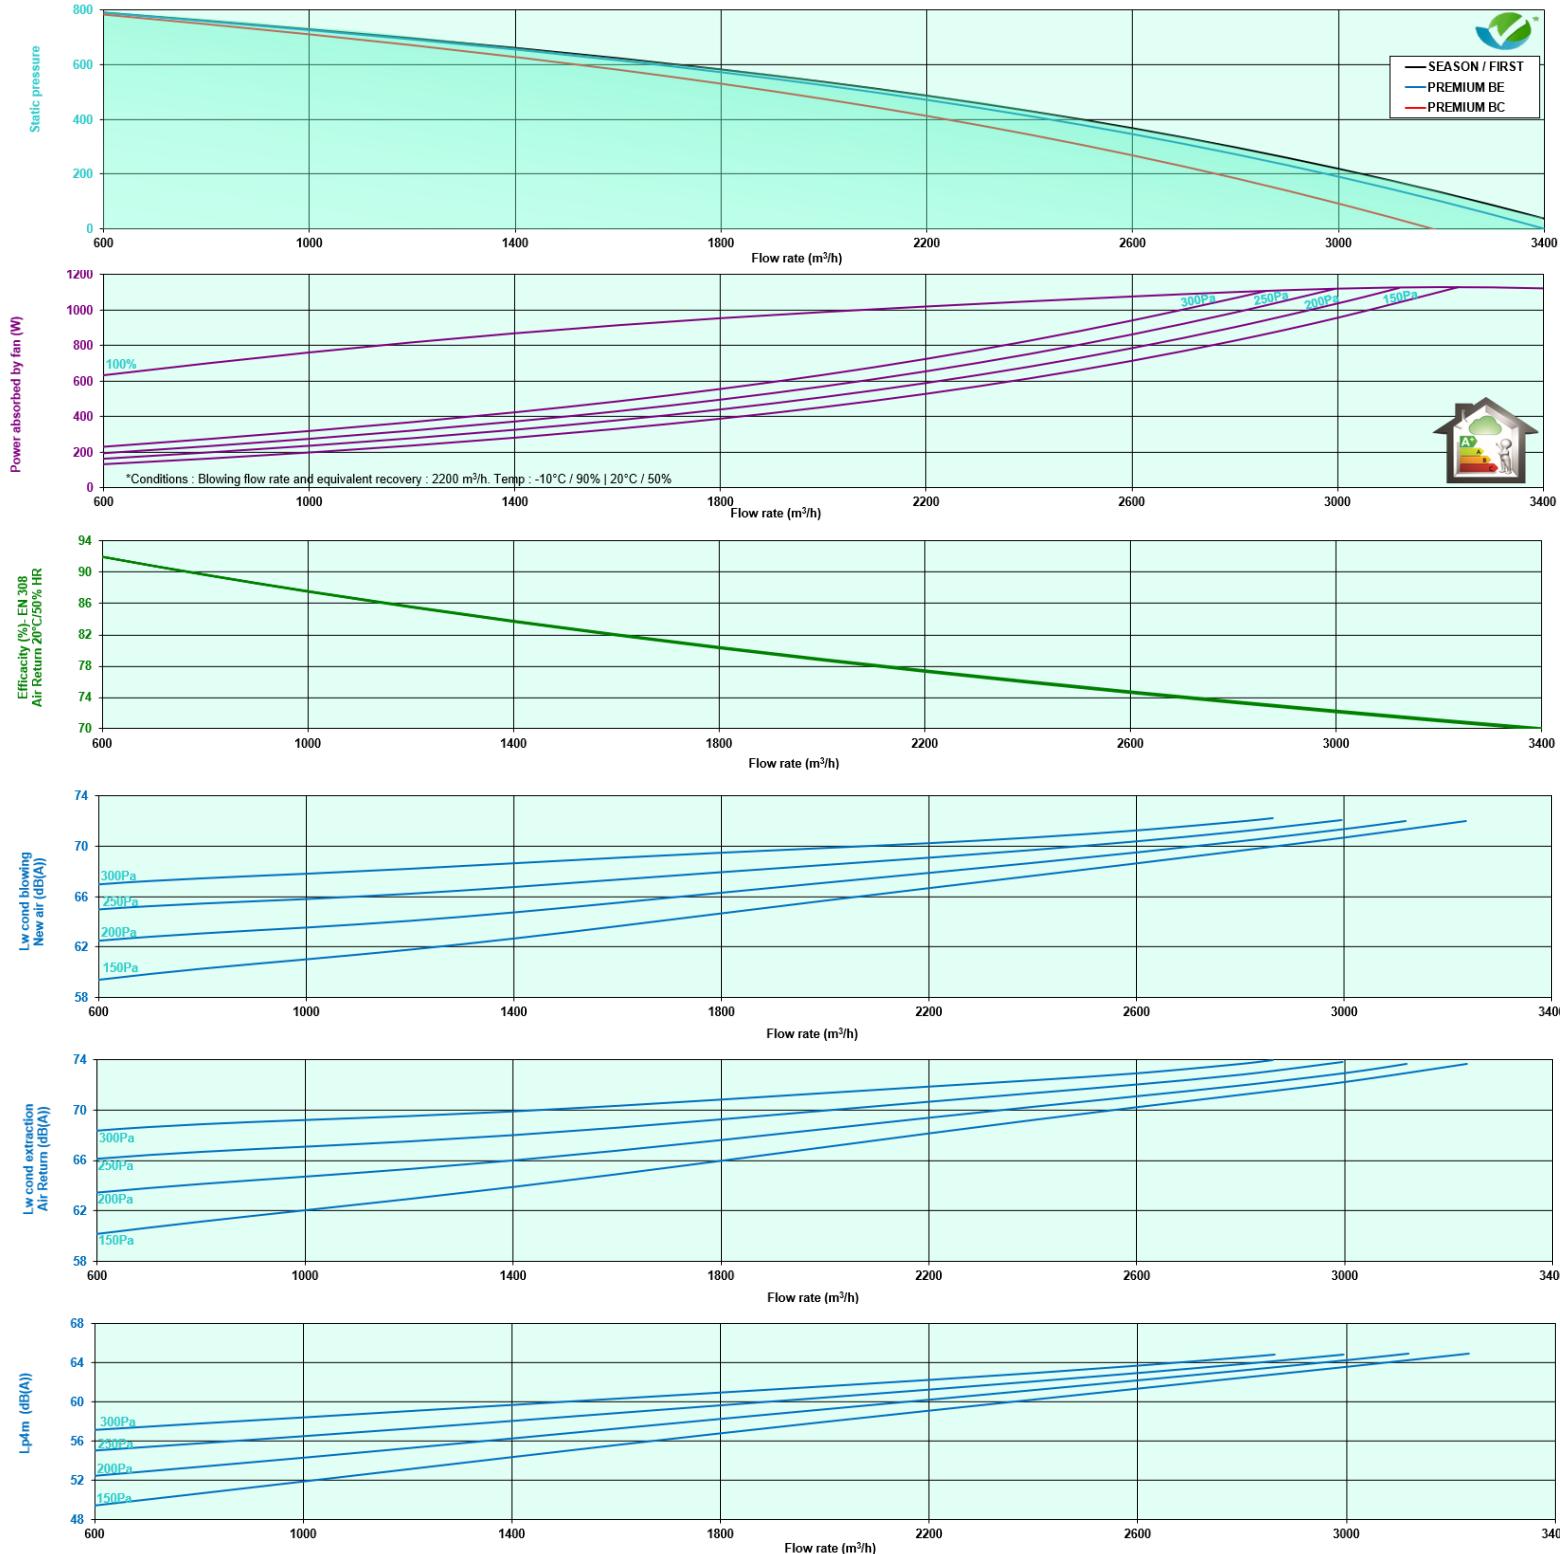
FREETIME® 2000

Electric coil - PREMIUM BE

Fresh air Air flow (m³/h)	0°C 2000	-5°C 2000	0°C 2000	-5°C 2000	-10°C 2000	-15°C 2000	-20°C 2000
Version	FIRST-SEASON		PREMIUM BE				
			Heating coil				
Total power kW	-		10,5				
Temp.°Con output from the unit	14,7	13,4	30,5	29,2	27,8	26,5	25,1



AIR CONTROL SOLUTIONS®

**FREETIME® 2700****FREETIME® 2700**

FREETIME® 2700

Hot water coil - PREMIUM BC

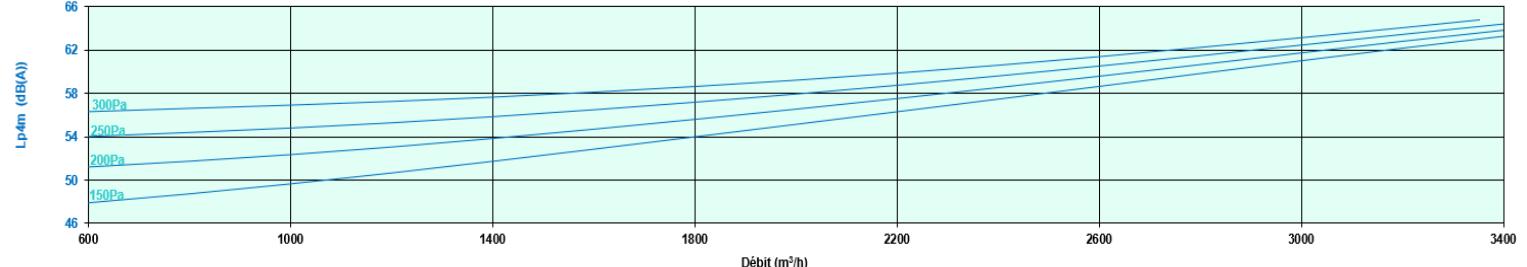
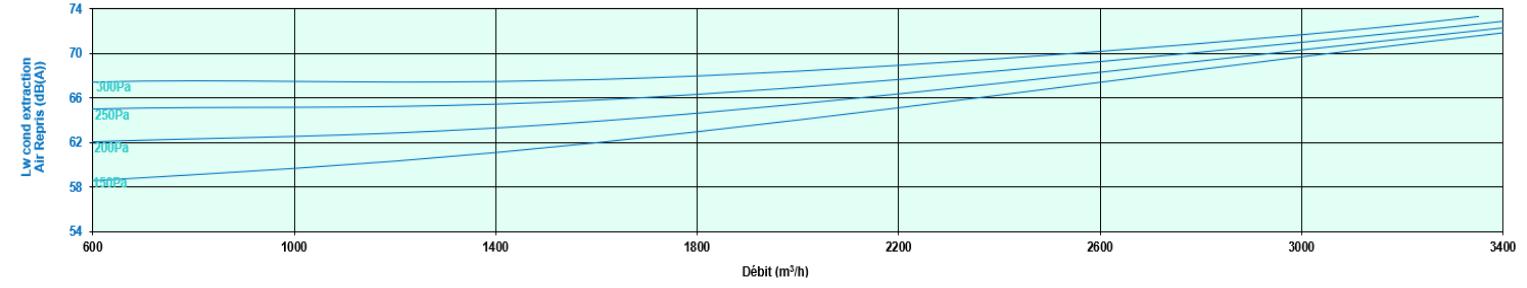
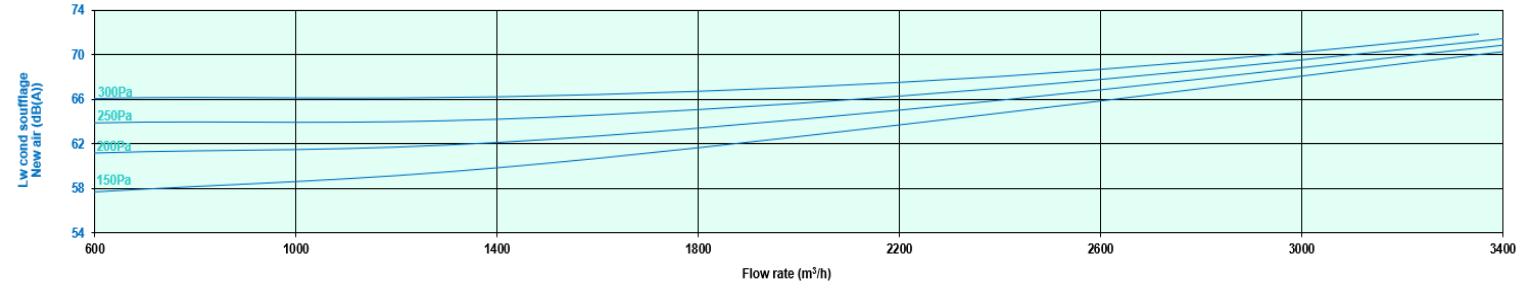
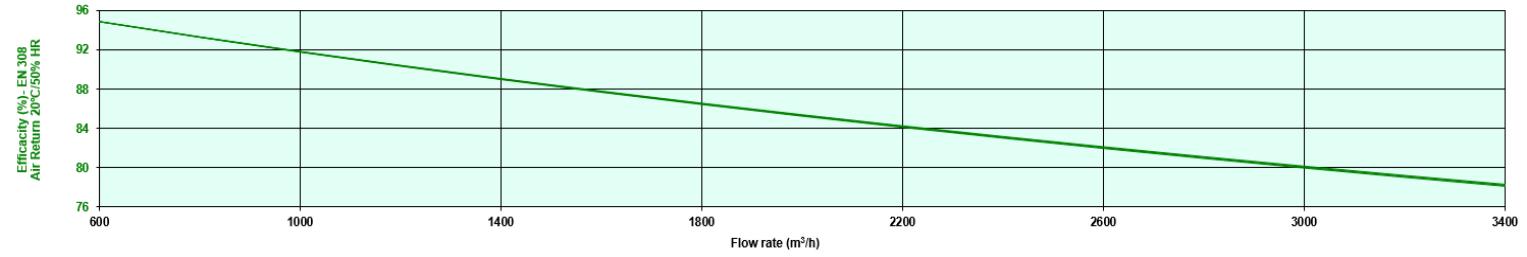
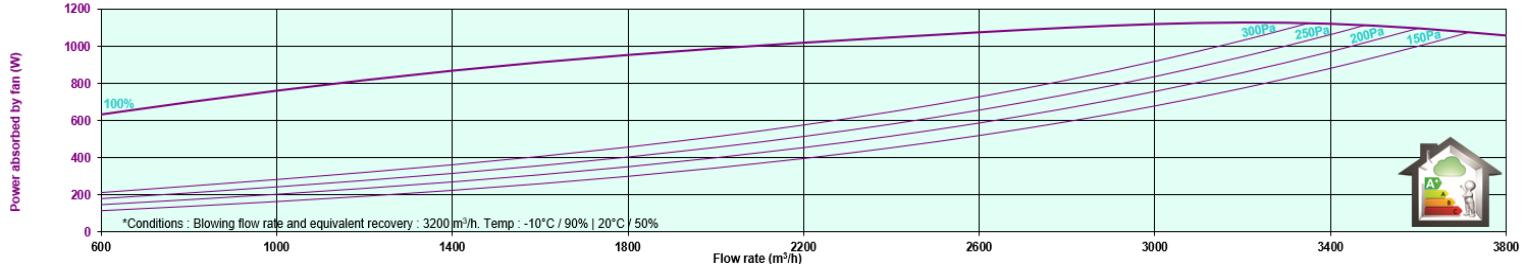
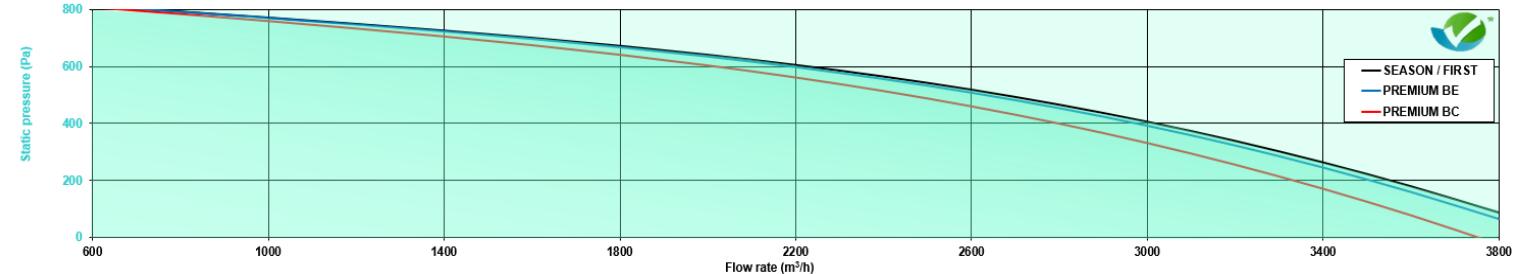
Water temp. (°C)	Air inlet temp. (°C)	Air flow (m³/h)	600	1000	1400	1800	2200	2600	3000
80/60	11	Motor(kW)/Air outlet temp(°C) 8,1/50,5	11,4 / 44,5	14,1 / 40,5	16,4 / 37,7	18,4 / 35,5	20,2 / 33,8	21,8 / 32,3	
		Water flow(l/h)/DP water (kPa)	355 / 1,9	501 / 3,7	620 / 5,5	720 / 7,2	808 / 9	887 / 10,6	957 / 12,3
60/50	15	Motor(kW)/Air outlet temp(°C) 7,5/51,7	10,6 / 46,1	13,1 / 42,4	15,3 / 39,8	17,1 / 37,8	18,8 / 36,1	20,3 / 34,8	
		Water flow(l/h)/DP water (kPa)	330 / 1,7	466 / 3,2	575 / 4,8	669 / 6,3	750 / 7,8	823 / 9,3	888 / 10,7
45/40	11	Motor(kW)/Air outlet temp(°C) 6,1/40,6	8,6 / 36,2	10,7 / 33,3	12,4 / 31,2	14 / 29,6	15,4 / 28,3	16,6 / 27,2	
		Water flow(l/h)/DP water (kPa)	527 / 4,2	749 / 8,1	929 / 12	1083 / 16	1218 / 19,9	1338 / 23,8	1446 / 27,5
	15	Motor(kW)/Air outlet temp(°C) 5,5/41,8	7,8 / 37,8	9,7 / 35,2	11,3 / 33,3	12,7 / 31,9	13,9 / 30,7	15 / 29,7	
		Water flow(l/h)/DP water (kPa)	478 / 3,5	679 / 6,7	841 / 10	980 / 13,3	1102 / 16,5	1210 / 19,7	1308 / 22,8
	11	Motor(kW)/Air outlet temp(°C) 4,4/32,2	6,2 / 29,1	7,7 / 27,1	9 / 25,6	10,1 / 24,5	11,1 / 23,5	12,1 / 22,8	
		Water flow(l/h)/DP water (kPa)	752 / 8,4	1072 / 16,3	1334 / 24,4	1557 / 32,6	1753 / 40,6	1928 / 48,5	2086 / 56,2
	15	Motor(kW)/Air outlet temp(°C) 3,8/33,4	5,4 / 30,8	6,7 / 29	7,8 / 27,7	8,8 / 26,7	9,7 / 25,9	10,5 / 25,2	
		Water flow(l/h)/DP water (kPa)	654 / 6,5	932 / 12,5	1158 / 18,8	1352 / 25	1521 / 31,2	1673 / 37,2	1809 / 43,1

FREETIME® 2700

Electric coil - PREMIUM BE

Fresh air Air flow (m³/h)	0°C 2700	-5°C 2700	0°C 2700	-5°C 2700	-10°C 2700	-15°C 2700	-20°C 2700	
Version	FIRST-SEASON							
	PREMIUM BE							
Total power kW			Heating coil					
Temp.°Con output from the unit	14,9	13,7	29,9	28,7	27,4	26,1	24,7	



**FREETIME® 3500****FREETIME® 3500**

FREETIME® 3500

Hot water coil - PREMIUM BC

Water temp. (°C/°C)	Air inlet temp. (°C)	Air flow (m³/h)	1000	1400	1800	2200	2600	3000	3400
80/60	11	Motor(kW)/Air outlet temp(°C)	12,7 / 48,3	15,9 / 44,3	18,7 / 41,4	21,1 / 39,1	23,3 / 37,2	25,3 / 35,7	27,1 / 34,3
		Waterflow(l/h)/DP water (kPa)	558 / 2,5	683 / 3,7	819 / 5	925 / 6,2	1021 / 7,4	1108 / 8,6	1188 / 9,8
60/50	15	Motor(kW)/Air outlet temp(°C)	11,9 / 49,7	14,8 / 45,9	17,4 / 43,2	19,6 / 41,1	21,6 / 39,6	23,5 / 37,9	25,2 / 36,7
		Waterflow(l/h)/DP water (kPa)	519 / 2,2	649 / 3,2	761 / 4,3	859 / 5,4	948 / 6,5	1029 / 7,5	1103 / 8,6
45/40	11	Motor(kW)/Air outlet temp(°C)	9,6 / 38,9	12 / 36	14,1 / 33,9	15,9 / 32,2	17,6 / 30,8	19,2 / 29,7	20,6 / 28,7
		Waterflow(l/h)/DP water (kPa)	830 / 5,3	1042 / 8,1	1225 / 10,9	1387 / 13,6	1533 / 16,4	1666 / 19,1	1788 / 21,8
45/40	15	Motor(kW)/Air outlet temp(°C)	8,7 / 40,3	10,9 / 37,7	12,8 / 35,7	14,4 / 34,2	16 / 33	17,3 / 31,9	18,6 / 31
		Waterflow(l/h)/DP water (kPa)	753 / 4,5	945 / 6,7	1110 / 9,1	1256 / 11,4	1388 / 13,7	1508 / 15,9	1619 / 18,1
45/40	11	Motor(kW)/Air outlet temp(°C)	6,9 / 31	8,6 / 29	10,2 / 27,5	11,5 / 26,3	12,7 / 25,3	13,8 / 24,5	14,9 / 23,8
		Waterflow(l/h)/DP water (kPa)	1185 / 10,6	1491 / 16,2	1756 / 21,8	1991 / 27,5	2203 / 33,1	2396 / 38,7	2574 / 44,1
45/40	15	Motor(kW)/Air outlet temp(°C)	6 / 32,5	7,5 / 30,7	8,8 / 29,3	10 / 28,3	11,1 / 27,4	12 / 26,7	12,9 / 26,1
		Waterflow(l/h)/DP water (kPa)	1032 / 8,2	1297 / 12,5	1527 / 16,9	1730 / 21,2	1914 / 25,6	2081 / 29,8	2235 / 34

FREETIME® 3500

Electric coil - PREMIUM BE

Fresh air Air flow (m³/h)	0°C 3500	-5°C 3500	0°C 3500	-5°C 3500	-10°C 3500	-15°C 3500	-20°C 3500
Version	FIRST-SEASON		PREMIUM BE				
Total power kW			Heating coil				
Temp. °Con output from the unit	15,7	14,6	29,8	28,7	27,1	26,4	25,3



SOFT **Calair**®
CALADAIR MATRIX SOLUTION





• SECURITY AND CONTROL



**PRESSOSTAT
FOULING ref. DEP**

Return air Filter (IP54)



**MANOMETER
WITH LIQUID J
ref. MANO**



**SMOKS ALARM
ref. CDAD**

Cabinet (IP54)



**BOX RELEASE
ref. BD**

TBTS 24 or 48Vcc
CASE (IP67)

• MODULATION FLOW



**DEPORTED
COMMAND
ref. POT VF**

Potentiometer only for
SEASON (IP54)



**COMMANDED
OUTSTRIP
COMFORT
ref. CDC PVGV2**

PV/GV 2 Ventilators CASE
(IP54)



**COMMANDED
OUTSTRIP COMFORT
ref. CDC1V2**

On/off/PV/GV 2 Ventilators
CASE (IP54)



**PRESENCE
DETECTOR
ref. 360 TOR SA**

ON/OFF or
PV/GV(SEASON
incompatible version)



**COMMANDED
OUTSTRIP COMFORT
ref. CDC2V2**

STOP /PV/GV 2 Ventilators
CASE (IP54)

CLIMATIC



**THERMOSTAT REVERSER
SUMMER/WINTER
ref. CHANGEOVER PAD**

For versions FIRST + CBX-BF used in changeover



**DUCT HUMIDITY SENSOR
ref. HR 010 SG**

Signal 0-10V (SEASON incompatible version)



**DUCT HUMIDITY SENSOR
ref. HR 010 SA**

Signal 0-10V (SEASON incompatible version)

• INSTALLATION



FLEXIBLE SLEEVE ref. MTS M0

Fire classification: M0
Male diameters (supply) / Female (Central side)



**CIRCULAR REGISTER
ref. RC4A**

Frost protection or isolation. Waterproof class 4
Ø 200 to 450



**DIRECT EXPANSION MODULE
R410A ref.CBX DX**

Installation in ducts (to see chapter
AIR TREATMENT for descriptions).
SEASON incompatible version



**DESHUMIDIFICATION MODULE ref
CBX**

Installation in girdle (see AIR TREATMENT chapter
for descriptions). Non compatible with SEASON
version.



ELECTROVALVE KIT ref KEE IP54

Installation in girdle (see AIR TREATMENT chapter
for descriptions). Non compatible with SEASON
version.

• RÉGULATION



**REGULATOR OF ZONE
MONOFUNCTION ref. SYSTEM TOP**

Zone Control All Or Not to associate with versions
LOBBY® flow modulation rate (constant pressure).



**MONOFUNCTION ZONE
REGULATOR ref. DIVA SYSTEM**

Modulation zone controller to associate with
LOBBY versions flow modulation rate (constant
pressure).



**MONOFUNCTION ZONE REGULATOR ref.
WONDEROOM**

To associate with the modulation versions of LOBBY
(constant pressure). Besides the zone management, the
regulator communicates with Freetime unit which
permits to manage the free-cooling / night-cooling
parameters.